


EZ TIMER INSTALLATION & OPERATION GUIDE

The DEKOR® EZ Timer is an optional addition to your lighting system allowing you to set the time for which the lights will stay on.

Installation


1. Locate the timer next to a GFCI outlet. It is required to install a GFI to help prevent damage caused by electrical surges.
2. **Timer must be installed vertically with receptacle facing down. Timer must be at least 1' (.305 m) from ground level when installed as per federal safety code height regulations.**
3. Install the timer in view of the sun but away from light sources such as street lamps or security flood lights for proper dusk/dawn operation.

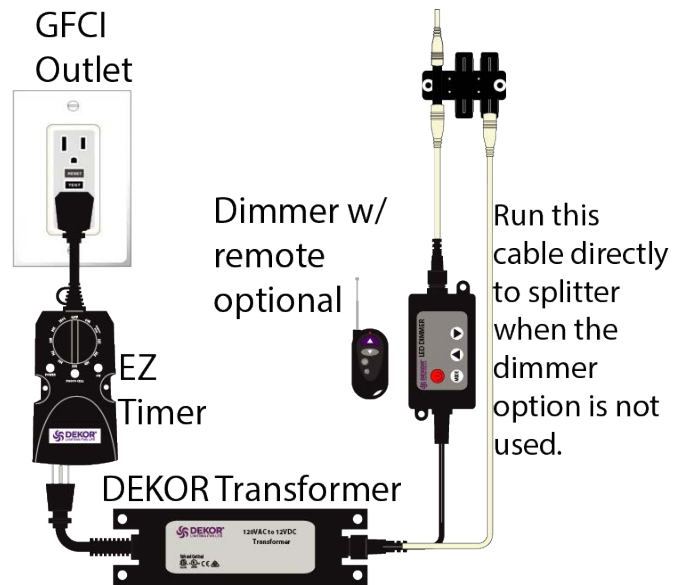

Photocell/Timer Operation Instructions

Select the mode of operation:

- Dusk to Dawn-Lights turn on at sunset and turn off at sunrise.
- 1 - 8 hours -Lights turn on at sunset and turn off after the hour selected.
- "On"-Turns the lights on always.
- "Off"-Turns the lights off always.

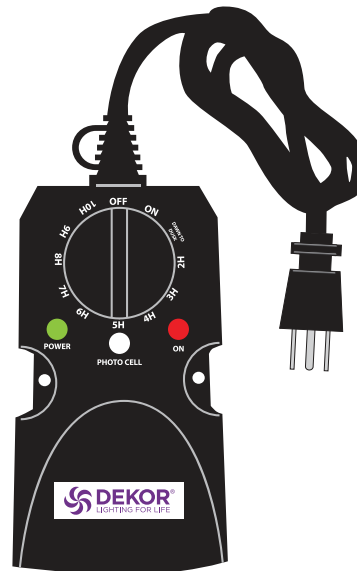

Caution: Do not connect more than 120V 5 amp load per outlet. Do not use for controlling electric motors or life saving equipment.